



INDOOR

CATALOGUE

2026-27

RECESSED SPOT LIGHT



	GL-0107	GL-0112	GL-0118
WATT	7W	12W	18W
DIMENSION	Ø40X76MM	Ø55X76MM	Ø70X85MM
CUTOUT	Ø35MM	Ø50MM	Ø70MM
BEAM ANGLE	24° 36° 60°	36° 38° 60°	36° 38° 60°

LED



COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS

OSRAM



PHILIPS

FULHAM
Harness the Horsepower



RF 2.4G



TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-0209	GL-0212
WATT	9W	12W
DIMENSION	Ø60X55MM	Ø80X62MM
CUTOUT	Ø55MM	Ø75MM
BEAM ANGLE	36°	36°

LED

 bridgelux
Bridging Light and Life™


 CREE
COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS

 OSRAM


 b.a.g. India
Reliable | Intelligent | Drivers


 PHILIPS


 FULHAM
Harness the Horsepower


 EAGLE RISE

RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-0307	GL-0312	GL-0318
WATT	7W	12W	18W
DIMENSION	Ø60X56MM	Ø70X60MM	Ø70X100MM
CUTOUT	Ø55MM	Ø70MM	Ø65MM
BEAM ANGLE	24°	38°	38°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-0407	GL-0412
WATT	7W	12W
DIMENSION	Ø40X83MM	Ø60X90MM
CUTOUT	Ø35MM	Ø50MM
BEAM ANGLE	24° 36° 60°	38° 36° 60°

LED


Bridging Light and Life™

CREE
COLOUR TEMPERATURE
27K | 3K | 4K | 5K | 6K | 3in1 | CCT
DRIVERS
OSRAM


Reliable | Intelligent | Drivers

PHILIPS


Harness the Horsepower


RF 2.4G

TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-0507	GL-0512	GL-0518
WATT	7W	12W	18W
DIMENSION	Ø43X82MM	Ø53X106MM	Ø63X112MM
CUTOUT	Ø35MM	Ø45MM	Ø55MM
BEAM ANGLE	36°	36°	36°

LED


Bridging Light and Life™

CREE

COLOUR TEMPERATURE
27K | 3K | 4K | 5K | 6K | 3in1 | CCT
DRIVERS
OSRAM


Reliable | Intelligent | Drivers

PHILIPS


Harness the Horsepower


RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-0607	GL-0612	GL-0618
WATT	7W	12W	18W
DIMENSION	Ø70X45MM	Ø80X48MM	Ø90X55MM
CUTOUT	Ø55MM	Ø75MM	Ø85MM
BEAM ANGLE	36°	36°	36°

LED


Bridging Light and Life™

CREE
COLOUR TEMPERATURE
27K | 3K | 4K | 5K | 6K | 3in1 | CCT
DRIVERS
OSRAM


Reliable | Intelligent | Drivers

PHILIPS


Harness the Horsepower


RF 2.4G

TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-0712	GL-0718
WATT	12-15W	18-22W
DIMENSION	Ø50X105MM	Ø60X105MM
CUTOUT	Ø45MM	Ø55MM
BEAM ANGLE	36°	36°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS







RF 2.4G



TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-0809	GL-0812	GL-0830	GL-0850
WATT	9W	12W	30W	50W
DIMENSION	Ø60X55MM	Ø80X62MM	Ø105X83MM	Ø135X90MM
CUTOUT	Ø55MM	Ø75MM	Ø95MM	Ø125MM
BEAM ANGLE	36°	36°	36°	36°

LED

 bridgelux
Bridging Light and Life™


 CREE
COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS

 OSRAM


 b.a.g. India
Reliable | Intelligent | Drivers


 PHILIPS


 FULHAM
Harness the Horsepower


 EAGLE RISE

RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-0907	GL-0912	GL-0918
WATT	7W	12W	18W
DIMENSION	Ø68X66MM	Ø83X75MM	Ø93X85MM
CUTOUT	Ø60MM	Ø75MM	Ø85MM
BEAM ANGLE	24°	38°	38°

LED

 bridgelux
Bridging Light and Life™


 CREE
COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS

 OSRAM


 b.a.g. India
Reliable | Intelligent | Drivers


 PHILIPS


 FULHAM
Harness the Horsepower


 EAGLE RISE

RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-01007	GL-01012	GL-01018
WATT	7W	12W	18W
DIMENSION	Ø53X61MM	Ø63X71MM	Ø83X83MM
CUTOUT	Ø45MM	Ø55MM	Ø75MM
BEAM ANGLE	36°	36°	36°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT


DRIVERS






RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE

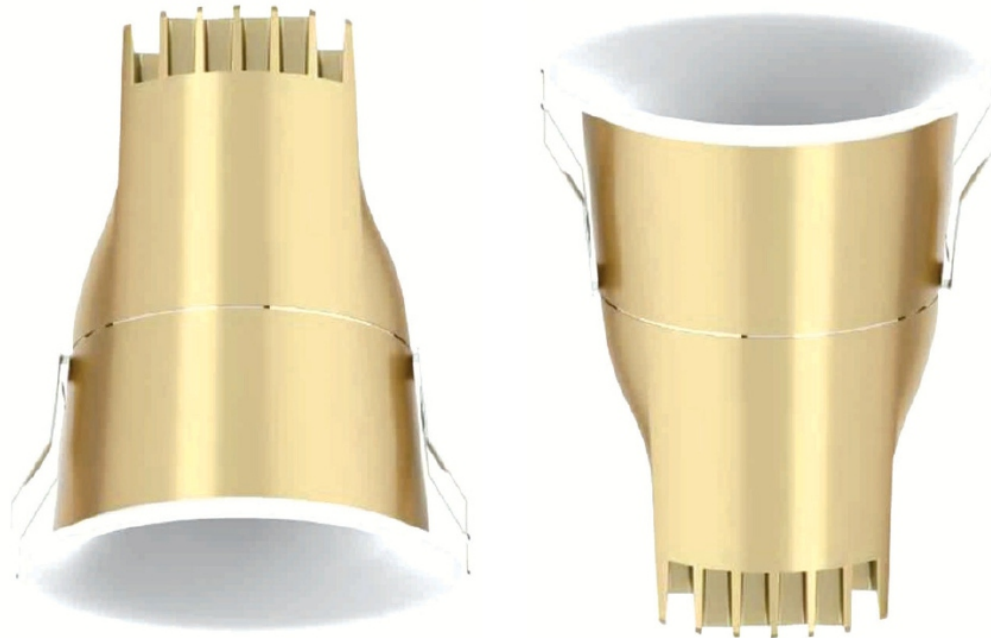

	GL-01107	GL-01112	GL-01118
WATT	7W	12W	18W
DIMENSION	Ø43X65MM	Ø63X94MM	Ø83X103MM
CUTOUT	Ø35MM	Ø55MM	Ø75MM
BEAM ANGLE	24°	38°	38°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS







RF 2.4G



TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-01207	GL-01212
WATT	7W	12W
DIMENSION	Ø60X56MM	Ø80X56MM
CUTOUT	Ø55MM	Ø75MM
BEAM ANGLE	24° 36° 60°	36° 38° 60°

LED


Bridging Light and Life™


COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS



Reliable | Intelligent | Drivers




Harness the Horsepower


RF 2.4G

TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-01307	GL-01312	GL-01318
WATT	7W	12W	18W
DIMENSION	Ø60X52MM	Ø80X50MM	Ø100X62MM
CUTOUT	Ø55MM	Ø75MM	Ø95MM
BEAM ANGLE	36°	36°	36°

LED


Bridging Light and Life™

CREE
COLOUR TEMPERATURE
27K | 3K | 4K | 5K | 6K | 3in1 | CCT
DRIVERS
OSRAM


Reliable | Intelligent | Drivers

PHILIPS


Harness the Horsepower


RF 2.4G

TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-01407	GL-01412	GL-01418
WATT	7W	12W	18W
DIMENSION	Ø62X25MM	Ø28X72MM	Ø31X83MM
CUTOUT	Ø55MM	Ø65MM	Ø75MM
BEAM ANGLE	38°	38°	38°

LED

 bridgelux
Bridging Light and Life™


 CREE
COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS

 OSRAM


 b.a.g. India
Reliable | Intelligent | Drivers


 PHILIPS


 FULHAM
Harness the Horsepower


 EAGLE RISE

RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-01507	GL-01512	GL-01518
WATT	7W	12W	18W
DIMENSION	Ø60X75MM	Ø70X75MM	Ø83X85MM
CUTOUT	Ø55MM	Ø65MM	Ø78MM
BEAM ANGLE	24° 38° 60°	24° 38° 60°	24° 38° 60°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS







RF 2.4G



TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-01607	GL-01612	GL-01618
WATT	7W	12W	18W
DIMENSION	Ø54X62MM	Ø70X70MM	Ø80X75MM
CUTOUT	Ø44MM	Ø60MM	Ø70MM
BEAM ANGLE	36°	36°	36°

LED


Bridging Light and Life™

CREE
COLOUR TEMPERATURE
27K | 3K | 4K | 5K | 6K | 3in1 | CCT
DRIVERS
OSRAM


Reliable | Intelligent | Drivers

PHILIPS


Harness the Horsepower


RF 2.4G

TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-01707	GL-01712	GL-01718
WATT	7W	12W	18W
DIMENSION	Ø65X85MM	Ø75X83MM	Ø85X86MM
CUTOUT	Ø55MM	Ø65MM	Ø75MM
BEAM ANGLE	24°	38°	38°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-01807	GL-01812	GL-01807	GL-01812
WATT	7W RD	12W RD	7W SQ	12W SQ
DIMENSION	Ø65X46MM	Ø80X52MM	Ø65X65MM	Ø85X85MM
CUTOUT	Ø55MM	Ø75MM	Ø55MM	Ø75MM
BEAM ANGLE	24°	38°	24°	38°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS








RF 2.4G



TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE

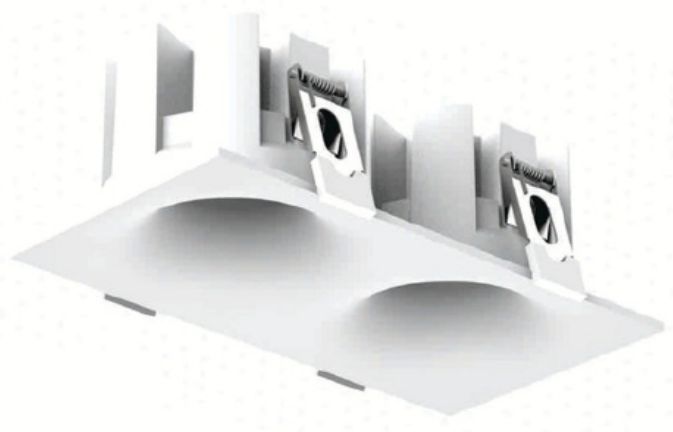

	GL-01907x02	GL-01912x02
WATT	7X2W	12X2W
DIMENSION	Ø122X65MM	Ø162X85MM
CUTOUT	Ø113X55MM	Ø153X75MM
BEAM ANGLE	38°	38°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS







RF 2.4G



TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-02007	GL-02012	GL-02018
WATT	7W	12W	18W
DIMENSION	Ø56X92MM	Ø75X106MM	Ø91X120MM
CUTOUT	Ø55MM	Ø70MM	Ø85MM
BEAM ANGLE	38°	38°	38°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G

TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-02107	GL-02112	GL-02118
WATT	7W	12W	18W
DIMENSION	Ø40X58MM	Ø60X88MM	Ø75X95MM
CUTOUT	Ø35MM	Ø52MM	Ø62MM
BEAM ANGLE	24° 38° 60°	24° 38° 60°	24° 38° 60°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-02207	GL-02212	GL-02218
WATT	7W	12W	18W
DIMENSION	Ø50X70MM	Ø85X65MM	Ø75X95MM
CUTOUT	Ø65MM	Ø75MM	Ø90MM
BEAM ANGLE	36°	36°	36°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS







RF 2.4G



TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-2001	GL-2001	GL-2001
WATT	7W	12W	18W
DIMENSION	Ø75X60MM	Ø85X80MM	Ø95X100MM
CUTOUT	Ø65MM	Ø75MM	Ø85MM
BEAM ANGLE	24° 36° 60°	36° 38° 60°	36° 38° 60°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-02403	GL-02407	GL-02412	GL-02424
WATT	3W	7W	12W	24W
DIMENSION	Ø47X73MM	Ø70X57MM	Ø85X65MM	Ø95X90MM
CUTOUT	Ø30MM	Ø55MM	Ø75MM	Ø86MM
BEAM ANGLE	60°	24° 38° 60°	24° 38° 60°	24° 38° 60°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



GL-02503

WATT	3W
DIMENSION	Ø38X28MM
CUTOUT	Ø25MM
BEAM ANGLE	60°

GL-02507

WATT	7W
DIMENSION	Ø63X60MM
CUTOUT	Ø57MM
BEAM ANGLE	24° 38° 60°

GL-02512

WATT	12W
DIMENSION	Ø84X79MM
CUTOUT	Ø74MM
BEAM ANGLE	24° 38° 60°

GL-02518

WATT	18W
DIMENSION	Ø95X100MM
CUTOUT	Ø85MM
BEAM ANGLE	24° 38° 60°

GL-02524

WATT	24W
DIMENSION	Ø115X105MM
CUTOUT	Ø105MM
BEAM ANGLE	24° 38° 60°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-02607	GL-02612	GL-02624
WATT	7W	12W	24W
DIMENSION	Ø68X62MM	Ø85X76MM	Ø162X83X90MM
CUTOUT	Ø60MM	Ø75MM	Ø75.5X75MM
BEAM ANGLE	25°	38°	38°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-02706	GL-02712	GL-02707x2	GL-02712x2
WATT	6W	12W	2X7W	2X12W
DIMENSION	Ø67X45MM	Ø85X55MM	Ø132X73X46MM	Ø186X85X60MM
CUTOUT	Ø60MM	Ø75MM	Ø122X63MM	Ø158X75MM
BEAM ANGLE	24° 38° 60°	24° 38° 60°	24° 38° 60°	24° 38° 60°

LED


Bridging Light and Life™


COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS



Reliable | Intelligent | Drivers




Harness the Horsepower


RF 2.4G

TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-02807	GL-02812	GL-02818
WATT	7W	12W	18W
DIMENSION	Ø62X43MM	Ø82X42MM	Ø105X49MM
CUTOUT	Ø55MM	Ø75MM	Ø96MM
BEAM ANGLE	36°	36°	36°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-02907	GL-02912	GL-02915	GL-02918
WATT	7W	12W	15W	18W
DIMENSION	Ø75X50MM	Ø84X57MM	Ø84X72MM	Ø90X69MM
CUTOUT	Ø65MM	Ø78MM	Ø78MM	Ø84MM
BEAM ANGLE	25°	38°	38°	38°

	GL-02930	GL-02940	GL-02950
WATT	30W	40W	50W
DIMENSION	Ø145X90MM	Ø160X100MM	Ø160X100MM
CUTOUT	Ø135MM	Ø145MM	Ø145MM
BEAM ANGLE	45°	45°	45°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-03007	GL-03012	GL-03018	GL-03024
WATT	7W	12W	18W	24W
DIMENSION	Ø65X78MM	Ø85X96MM	Ø105X110MM	Ø105X121MM
CUTOUT	Ø55MM	Ø75MM	Ø95MM	Ø95MM
BEAM ANGLE	24° 36° 60°	24° 36° 60°	24° 36° 60°	24° 36° 60°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-03115	GL-03125
WATT	15W	25W
DIMENSION	Ø65X114MM	Ø85X147MM
CUTOUT	Ø55MM	Ø75MM
BEAM ANGLE	24° 38° 60°	24° 38° 60°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G

TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-03207	GL-03212	GL-03218	GL-03224
WATT	7W	12W	18W	24W
DIMENSION	Ø65X78MM	Ø85X96MM	Ø105X121MM	Ø105X121MM
CUTOUT	Ø55MM	Ø75MM	Ø95MM	Ø95MM
BEAM ANGLE	24° 36° 60°	24° 36° 60°	24° 36° 60°	24° 36° 60°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS







RF 2.4G



TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-03303	GL-03307	GL-03312	GL-03318
WATT	3W	7W	12W	18W
DIMENSION	Ø30X40MM	Ø42X60MM	Ø55X62MM	Ø55X112MM
CUTOUT	Ø25MM	Ø35MM	Ø45MM	Ø45MM
BEAM ANGLE	36°	36°	36°	36°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-03407	GL-03412	GL-03418	GL-03412x2
WATT	7W	12W	18W	2X12W
DIMENSION	Ø65X50MM	Ø85X60MM	Ø105X75MM	Ø166X85X62MM
CUTOUT	Ø55MM	Ø75MM	Ø95MM	Ø155X75MM
BEAM ANGLE	36°	36°	36°	36°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-03507	GL-03512	GL-03515
WATT	7W	12W	15W
DIMENSION	Ø50X50MM	Ø50X65MM	Ø50X85MM
BEAM ANGLE	36°	36°	36°

LED


Bridging Light and Life™


COLOUR TEMPERATURE
27K | 3K | 4K | 5K | 6K | 3in1 | CCT
DRIVERS



Reliable | Intelligent | Drivers




Harness the Horsepower


RF 2.4G

TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-03512	GL-03515
WATT	12W	15W
DIMENSION	Ø50X70MM	Ø50X70MM
BEAM ANGLE	36°	36°

LED


Bridging Light and Life™


COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS



Reliable | Intelligent | Drivers




Harness the Horsepower


RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-03510	GL-03512
WATT	10W	12W
DIMENSION	Ø50X55MM	Ø50X75MM
BEAM ANGLE	36°	36°

LED


Bridging Light and Life™

CREE
COLOUR TEMPERATURE
27K | 3K | 4K | 5K | 6K | 3in1 | CCT
DRIVERS
OSRAM


Reliable | Intelligent | Drivers

PHILIPS


Harness the Horsepower


RF 2.4G

TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



GL-03612

WATT	12W
DIMENSION	Ø80X65MM
CUTOUT	Ø75MM
BEAM ANGLE	36°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS







RF 2.4G



TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-03712	GL-03718	GL-03724
WATT	12W	18W	24W
DIMENSION	Ø85X70MM	Ø78X110MM	Ø91X135MM
CUTOUT	Ø75MM	Ø95MM	Ø125MM
BEAM ANGLE	24° 36° 60°	24° 36° 60°	24° 36° 60°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G

TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-05112	GL-05118	GL-05124
WATT	12W	18W	24W
DIMENSION	Ø80MM	Ø100X95MM	Ø185X100X95MM
CUTOUT	Ø75MM	Ø90MM	Ø170X90MM
BEAM ANGLE	36°	36°	36°

LED



bridgelux
Bridging Light and Life™



CREE

COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS



OSRAM



b.a.g. India
Reliable | Intelligent | Drivers



PHILIPS



FULHAM
Harness the Horsepower



EAGLE RISE

RF 2.4G



TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-05207	GL-05212	GL-05214	GL-05224
WATT	7W	12W	2X7W	2X12W
DIMENSION	Ø60X85MM	Ø85X85MM	Ø120X69X91MM	Ø180X191X116MM
CUTOUT	Ø55MM	Ø75MM	Ø121X60MM	Ø164X77MM
BEAM ANGLE	36°	36°	36°	36°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G

TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-05307	GL-05314
WATT	7W	2X7W
DIMENSION	Ø42X60MM	Ø55X62MM
CUTOUT	Ø35MM	Ø45MM
BEAM ANGLE	36°	36°

LED


Bridging Light and Life™


COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS



Reliable | Intelligent | Drivers




Harness the Horsepower


RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE


GL-04112

WATT	12W
DIMENSION	Ø85X71MM
CUTOUT	Ø78MM
BEAM ANGLE	38°

LED

CREE
COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS
OSRAM

PHILIPS


RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-03807	GL-03812	GL-03818
WATT	7W	12W	18W
DIMENSION	Ø64X74MM	Ø70X90MM	Ø70X90MM
BEAM ANGLE	36°	36°	36°

LED


Bridging Light and Life™

CREE
COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS
OSRAM


Reliable | Intelligent | Drivers

PHILIPS


Harness the Horsepower


RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-04310	GL-04315	GL-04320	GL-04324
WATT	10W	15W	20W	24W
DIMENSION	Ø50X135MM	Ø60X150MM	Ø80X150MM	Ø80X180MM
BEAM ANGLE	15° 24° 38° 60°	15° 24° 38° 60°	15° 24° 38° 60°	15° 24° 38° 60°

	GL-04330	GL-04336	GL-04340
WATT	30W	36W	40W
DIMENSION	Ø90X180MM	Ø100X180MM	Ø120X175MM
BEAM ANGLE	15° 24° 38° 60°	15° 24° 38° 60°	15° 24° 38° 60°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-03907	GL-03912	GL-03924
WATT	7W RD	12W RD	2X12W RD
DIMENSION	Ø55X73MM	Ø74X100MM	Ø95X115MM
BEAM ANGLE	38°	38°	38°

	GL-03907	GL-03912	GL-03924
WATT	7W SQ	12W SQ	2X12W SQ
DIMENSION	Ø55X55X73MM	Ø74X75X95MM	Ø95X95X120MM
BEAM ANGLE	38°	38°	38°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



GL-04012

WATT	12W
DIMENSION	Ø55X162MM
BEAM ANGLE	38°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS







RF 2.4G



TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-04212	GL-04220
WATT	12W	18W
DIMENSION	Ø85X71MM	Ø100X120MM
BEAM ANGLE	38°	38°

LED


Bridging Light and Life™


COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS



Reliable | Intelligent | Drivers




Harness the Horsepower


RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-04407	GL-04412	GL-04418	GL-04430
WATT	7W	12W	18W	30W
DIMENSION	Ø47X37X117MM	Ø67X37X117MM	Ø47X63X117MM	Ø187X37X117MM
BEAM ANGLE	36°	36°	36°	36°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-04610	GL-04615	GL-04620	GL-04624
WATT	10W	15W	20W	24W
DIMENSION	Ø50X135MM	Ø60X150MM	Ø80X150MM	Ø80X180MM
BEAM ANGLE	15° 24° 38° 60°	15° 24° 38° 60°	15° 24° 38° 60°	15° 24° 38° 60°

	GL-04630	GL-04636	GL-04640
WATT	30W	36W	40W
DIMENSION	Ø90X180MM	Ø100X180MM	Ø120X175MM
BEAM ANGLE	15° 24° 38° 60°	15° 24° 38° 60°	15° 24° 38° 60°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-04510	GL-04515	GL-04520	GL-04524
WATT	10W	15W	20W	24W
DIMENSION	Ø50X135MM	Ø60X150MM	Ø80X150MM	Ø80X180MM
BEAM ANGLE	15° 24° 38° 60°	15° 24° 38° 60°	15° 24° 38° 60°	15° 24° 38° 60°

	GL-04530	GL-04536	GL-04540
WATT	30W	36W	40W
DIMENSION	Ø90X180MM	Ø100X180MM	Ø120X175MM
BEAM ANGLE	15° 24° 38° 60°	15° 24° 38° 60°	15° 24° 38° 60°

LED


Bridging Light and Life™
CREE ⇄**COLOUR TEMPERATURE**

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS**OSRAM**


Reliable | Intelligent | Drivers
PHILIPS


Harness the Horsepower


RF 2.4G

TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-04712	GL-04718
WATT	12W	18W
DIMENSION	Ø80X100MM	Ø100X150MM
BEAM ANGLE	38°	38°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS







RF 2.4G



TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-04810	GL-04820	GL-04830	GL-04840
WATT	10W	20W	30W	40W
DIMENSION	Ø50X100MM	Ø60X135MM	Ø80X150MM	Ø90X180MM
BEAM ANGLE	38°	38°	38°	38°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS







RF 2.4G



TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-04925	GL-04930	GL-04936
WATT	25W	30W	36W
DIMENSION	Ø80X115MM	Ø90X120MM	Ø100X120MM
BEAM ANGLE	15° 24° 38° 60°	15° 24° 38° 60°	15° 24° 38° 60°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-05010	GL-05015	GL-05020
WATT	10W	15W	20W
DIMENSION	Ø50X135MM	Ø60X150MM	Ø80X150MM
BEAM ANGLE	15° 24° 38° 60°	15° 24° 38° 60°	15° 24° 38° 60°

	GL-05024	GL-05030	GL-05036
WATT	24W	30W	36W
DIMENSION	Ø80X180MM	Ø90X180MM	Ø100X180MM
BEAM ANGLE	15° 24° 38° 60°	15° 24° 38° 60°	15° 24° 38° 60°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-05403	GL-05412	GL-05418
WATT	3W	12W	18W
DIMENSION	Ø52X52X56MM	Ø128X52X56MM	Ø90X90X56MM
CUTOUT	Ø42X42MM	Ø120X42MM	Ø80X80MM
BEAM ANGLE	38°	38°	38°

	GL-05424	GL-05436	GL-05440
WATT	24W	36W	40W
DIMENSION	Ø205X52X56MM	Ø128X56MM	Ø395X52X58MM
CUTOUT	Ø195X52MM	Ø120X120MM	Ø395X45MM
BEAM ANGLE	38°	38°	38°

LED


COLOUR TEMPERATURE
27K | 3K | 4K | 5K | 6K | 3in1 | CCT
DRIVERS





RF 2.4G

TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-05503	GL-05506	GL-05512
WATT	3W	6W	12W
DIMENSION	Ø45X45X48MM	Ø75X45X55MM	Ø148X45X45MM
CUTOUT	Ø39X39MM	Ø65X35MM	Ø136X32MM
BEAM ANGLE	36°	36°	36°

	GL-05524	GL-05536
WATT	24W	36W
DIMENSION	Ø280X43X65MM	Ø412X45X65MM
CUTOUT	Ø270X32MM	Ø404X32MM
BEAM ANGLE	36°	36°

LED

 bridgelux
Bridging Light and Life™


 CREE
COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS

 OSRAM


 b.a.g. India
Reliable | Intelligent | Drivers


 PHILIPS


 FULHAM
Harness the Horsepower


 EAGLE RISE

RF 2.4G



TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-05606	GL-05612
WATT	6W	12W
DIMENSION	Ø97X45X43MM	Ø154X45X43MM
CUTOUT	Ø91X35MM	Ø148X35MM
BEAM ANGLE	36°	36°

LED


Bridging Light and Life™

CREE
COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS
OSRAM


Reliable | Intelligent | Drivers

PHILIPS


Harness the Horsepower


RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE

**GL-05712**

WATT	12W
DIMENSION	Ø134X34X40MM
CUTOUT	Ø126X28MM
BEAM ANGLE	38°

LED


Bridging Light and Life™
CREE ⇄**COLOUR TEMPERATURE**

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS**OSRAM**


Reliable | Intelligent | Drivers
PHILIPS


Harness the Horsepower


RF 2.4G

TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-05812	GL-05824
WATT	12W	24W
DIMENSION	Ø148X45X32MM	Ø280X45X32MM
BEAM ANGLE	38°	38°

LED

 bridgelux
Bridging Light and Life™


 CREE
COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS

 OSRAM


 b.a.g. India
Reliable | Intelligent | Drivers


 PHILIPS


 FULHAM
Harness the Horsepower


 EAGLE RISE

RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



	GL-05912	GL-05918	GL-05924
WATT	12W	18W	24W
DIMENSION	Ø120X50MM	Ø155X55MM	Ø170X50MM
CUTOUT	Ø110MM	Ø145MM	Ø160MM
BEAM ANGLE	120°	120°	120°

LED




COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

DRIVERS






RF 2.4G


TRI COLOUR WITH RF + BT + WI-FI DIMMING AVAILABLE



12V | 24V

2835-120 LED

12V | 24V

2835-180 LED

12V | 24V

2835-240 LED


12V | 24V

2835-240 LED CCT

WATT	10W	16W	22W	20W
PCB SIZE	5MM 8MM	5MM 10MM	10MM	10MM

COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

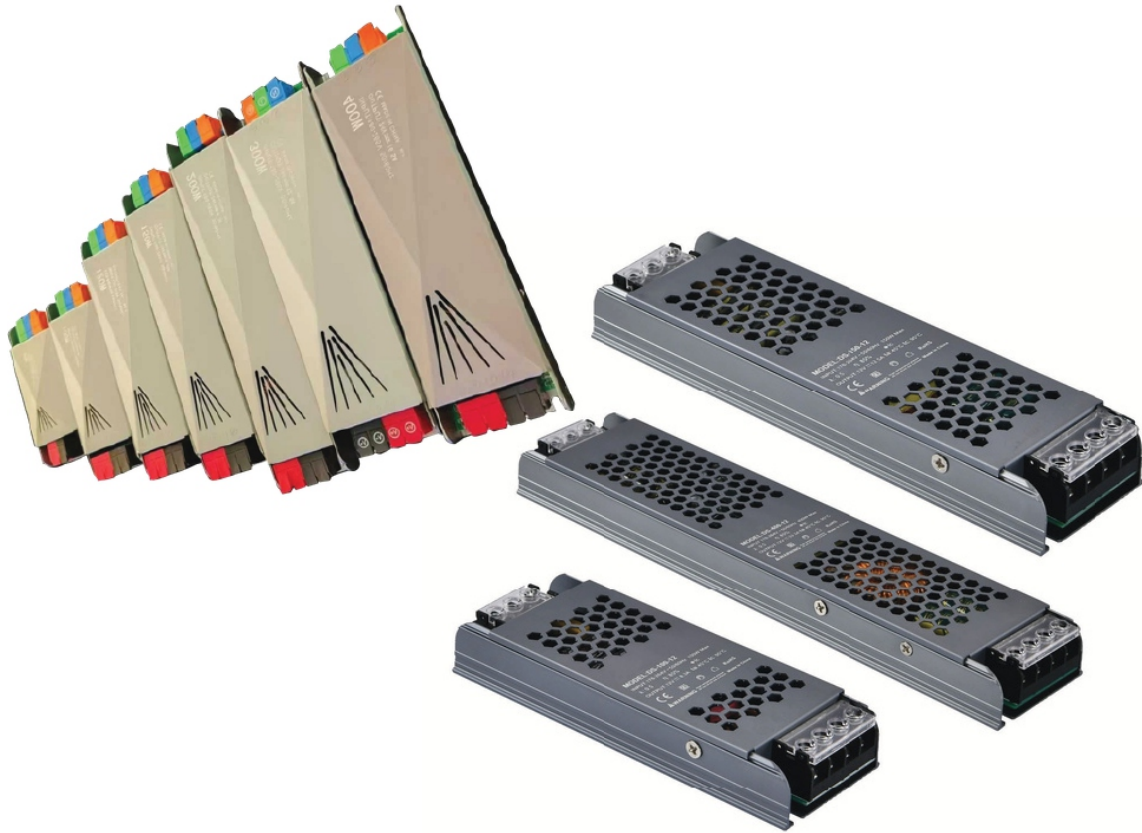

	12V 24V	12V 24V	12V 24V	12V 24V
WATT	36W	60W	100W	120W
DIMENSION	95X35X23MM	120X35X23MM	124X43X23MM	124X43X23MM

	12V 24V	12V 24V	12V 24V	12V 24V
WATT	150W	200W	300W	400W
DIMENSION	158X50X23MM	165X50X23MM	208X50X23MM	238X50X23MM

COLOUR TEMPERATURE

27K | 3K | 4K | 5K | 6K | 3in1 | CCT

**3 W****6 W****9 W****12 W****12 W****24 W**

	GL-10003	GL-10006	GL-10009
WATT	3W	6W	9W
DIMENSION	Ø75X23MM	Ø75X23MM	Ø110X23MM
BEAM ANGLE	45°	45°	45°

	GL-10012	GL-10018	GL-10024
WATT	12W	18W	24W
DIMENSION	Ø110X23MM	Ø230X52MM	Ø300X52MM
BEAM ANGLE	45°	45°	45°

LED**OSRAM****COLOUR TEMPERATURE****3K | 4K | 6K | RGB**

IP68 UNDER WATER RECESSED



3 W



6 W



9 W



12 W

12V DC

12V DC

12V DC

12V DC

GL-10103

GL-10106

GL-10109

GL-10112

WATT	3W	6W	9W	12W
DIMENSION	Ø100X23MM	Ø100X23MM	Ø140X23MM	Ø140X23MM
CUTOUT	Ø75MM	Ø75MM	Ø110MM	Ø110MM
BEAM ANGLE	45°	45°	45°	45°
WIRE LENGTH	2 MTR	2 MTR	2 MTR	2 MTR

LED

OSRAM

COLOUR TEMPERATURE

3K | 4K | 6K | RGB

IP68 UNDER WATER SURFACE WITH STAND

**3 W****6 W****9 W****12 W**

12V DC

GL-10203

12V DC

GL-10206

12V DC

GL-10209

12V DC

GL-10212

WATT	3W	6W	9W	12W
DIMENSION	Ø75X23MM	Ø75X23MM	Ø110X23MM	Ø110X23MM
BEAM ANGLE	45°	45°	45°	45°
WIRE LENGTH	2 MTR	2 MTR	2 MTR	2 MTR

LED**OSRAM****COLOUR TEMPERATURE****3K | 4K | 6K | RGB | ABER PINK**

IP65 SURFACE WALL WASHER



230VDC

GL-10303

WATT	3W
DIMENSION	Ø94X43X48MM
BEAM ANGLE	15° 30° 45° 60°

230VDC

GL-10306

WATT	6W
DIMENSION	Ø168X43X48MM
BEAM ANGLE	15° 30° 45° 60°

230VDC

GL-10311

WATT	11W
DIMENSION	Ø300X43X48MM
BEAM ANGLE	15° 30° 45° 60°

230VDC

GL-10322

WATT	22W
DIMENSION	Ø600X43X48MM
BEAM ANGLE	15° 30° 45° 60°

230VDC

GL-10333

WATT	33W
DIMENSION	Ø900X43X48MM
BEAM ANGLE	15° 30° 45° 60°

230VDC

GL-10345

WATT	45W
DIMENSION	Ø1200X43X48MM
BEAM ANGLE	15° 30° 45° 60°

MATERIAL**ALUMINIUM + PC****WIRE****1 FEET****LED****OSRAM****COLOUR TEMPERATURE****3K | 4K | 6K | RGB | ABER PINK**

IP65 SURFACE WALL WASHER HOOD



24VDC

GL-10406

24VDC

GL-10409

24VDC

GL-10415

24VDC

GL-10418

WATT	6W	9W	15W	18W
DIMENSION	Ø200X35X25MM	Ø300X25X35MM	Ø500X35X25MM	Ø600X34X25MM
BEAM ANGLE	15° 30° 45° 60°	15° 30° 45° 60°	15° 30° 45° 60°	15° 30° 45° 60°

24VDC

GL-10427

24VDC

GL-10430

24VDC

GL-10436

WATT	27W	30W	36W
DIMENSION	Ø900X35X25MM	Ø1000X35X25MM	Ø1200X35X25MM
BEAM ANGLE	15° 30° 45° 60°	15° 30° 45° 60°	15° 30° 45° 60°

MATERIAL**ALUMINIUM + PC****WIRE****1 FEET****LED****OSRAM****COLOUR TEMPERATURE****3K | 4K | 6K | RGB | ABER PINK**

IP65 RECESSED WALL WASHER



24VDC

GL-10506

WATT	6W
DIMENSION	Ø210X37X35MM
BEAM ANGLE	15° 30° 45° 60°

24VDC

GL-10509

WATT	9W
DIMENSION	Ø210X37X35MM
BEAM ANGLE	15° 30° 45° 60°

24VDC

GL-10518

WATT	18W
DIMENSION	Ø210X37X35MM
BEAM ANGLE	15° 30° 45° 60°

24VDC

GL-10527

WATT	27W
DIMENSION	Ø210X37X35MM
BEAM ANGLE	15° 30° 45° 60°

24VDC

GL-10536

WATT	36W
DIMENSION	Ø210X37X35MM
BEAM ANGLE	15° 30° 45° 60°

MATERIAL

ALUMINIUM + PC + MC + SS

WIRE

1 FEET

LED**OSRAM****COLOUR TEMPERATURE**

3K | 4K | 6K | RGB | ABER PINK



	WATT	BEAM ANGLE
GL-10724	24W	120°
GL-10736	36W	120°
GL-10750	50W	120°
GL-107100	100W	120°

GL-10830	30W	120°
GL-10860	60W	120°
GL-108120	120W	120°
GL-108180	180W	120°
GL-108240	240W	120°

LED


Bridging Light and Life™

COLOUR TEMPERATURE
3K | 4K | 6K | RED | GREEN | BLUE



GEMINI

LIGHTING

www.geminilighting.in